

CHENANEP

Create new materials
change new life

TEL：15963718879
WeChat：15963718879
email：1069047666@qq.com

Jining Chenan Environmental Protection Material Co., Ltd.

Company Profile

Jining Chenan Environmental Protection Material Co., Ltd. focuses on product research and development, mold manufacturing and plastic product production, mold modeling, design, manufacturing and sales of mold . The company specializes in the production of three-chamber plastic septic tanks,rainwater collection modules, plastic grease traps, plastic drainage ditch, inspection well, trash can and other engineering plastic products.

We have a professional sales and technical team to provide customers with high-quality products, professional technical support and thoughtful after-sales service. If you are interested in our company's products, please leave a message online or call for consultation.









Plastic septic tank

Septic Tanks are widely used for domestic sewage treatment projects, residential, hotels,communities, office buildings, schools, hospitals, barracks, public toilets, drainage treatment of food processing enterprises, residential buildings and other places or domestic sewage treatment.

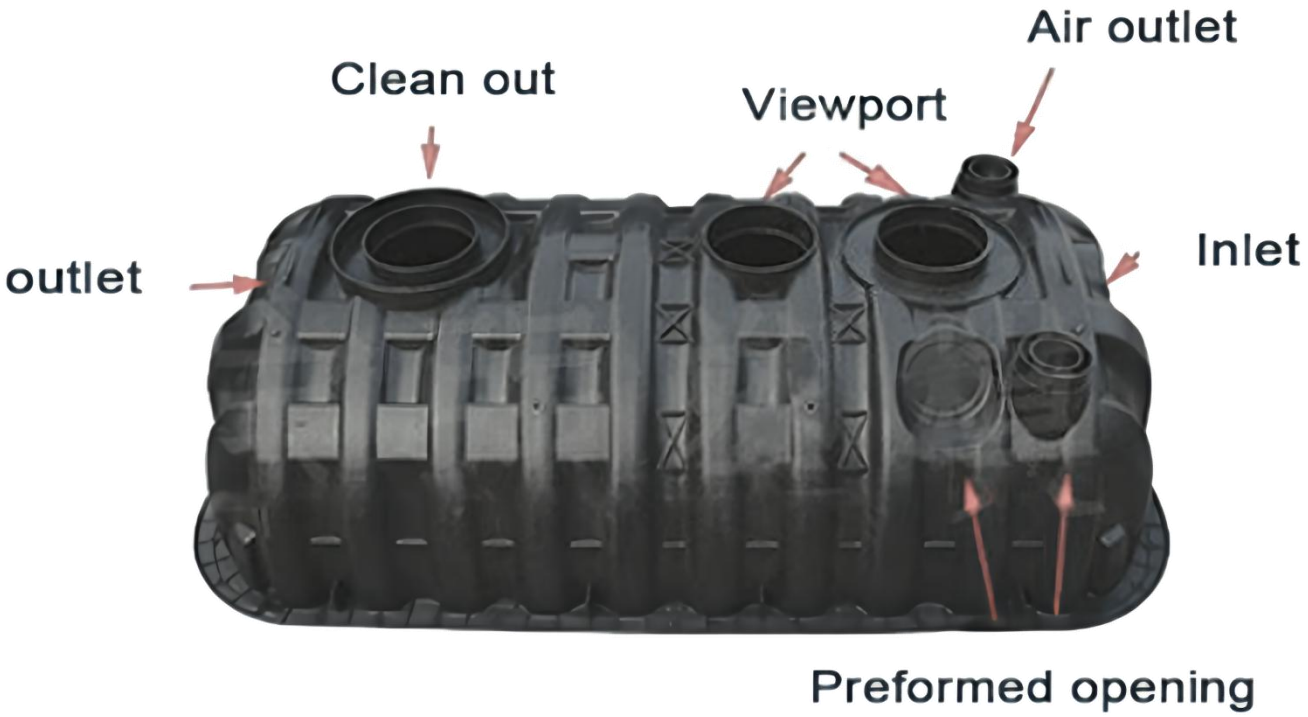

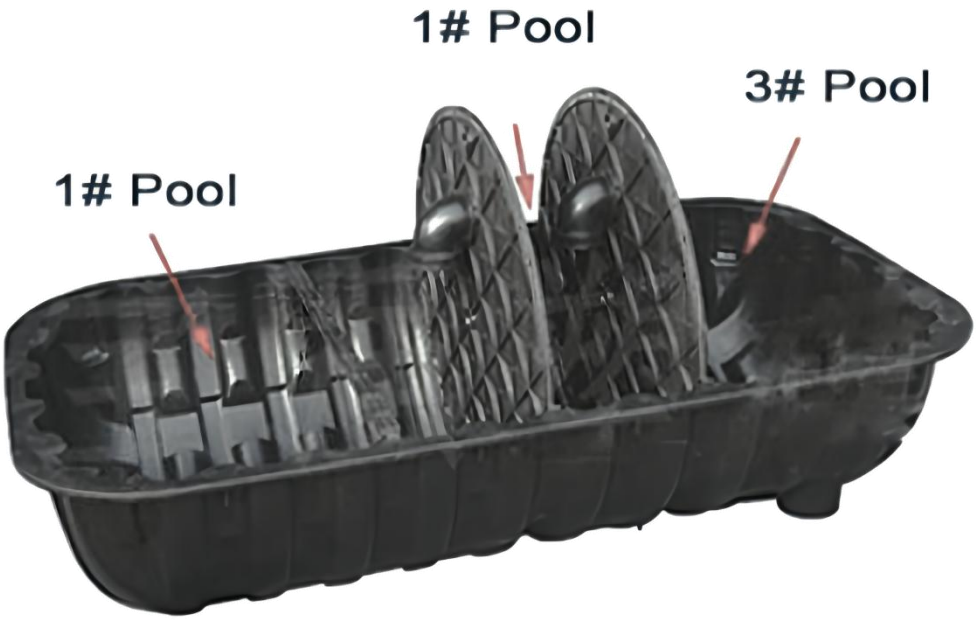

Product Specification


CHENAN EP



Model:	600L septic tank
Size:	1572*832*785mm
Thickness:	5mm
Weight:	26kg
User count:	1-4people



Model:	800L septic tank
Size:	1540*980*920mm
Thickness:	3mm
Weight:	34kg
User count:	3-7people

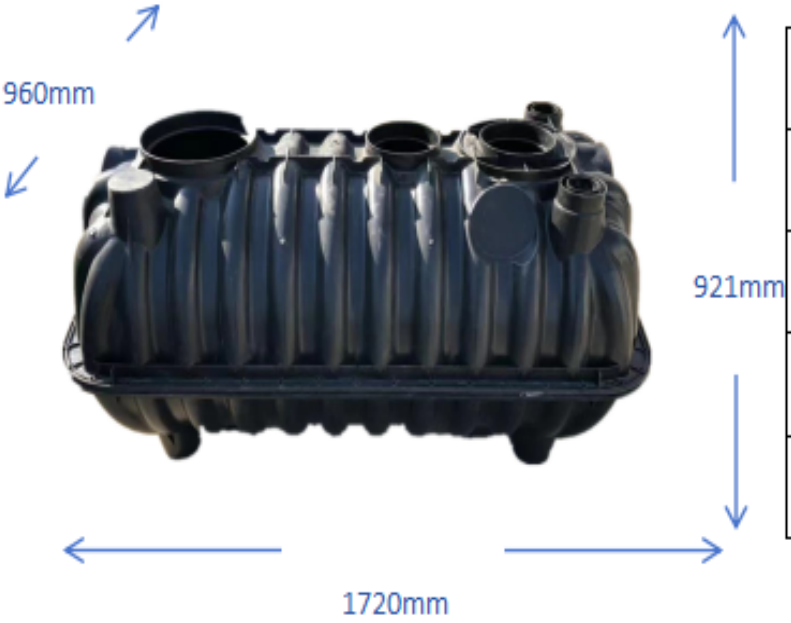

Model:	1000L septic tank
Size:	1720*960*921mm
Thickness:	3mm/4mm/5mm/7mm
Weight:	34kg/42kg/55kg/64kg
User count:	5-9people



Model:	1000L septic tank
Size:	1680*1000*950mm
Thickness:	3mm
Weight:	33kg
User count:	5-9people



Model:	1200L septic tank
Size:	1943*980*941mm
Thickness:	4mm
Weight:	42kg
User count:	6-10people



Model:	1500L septic tank
Size:	2009*1082*1037mm
Thickness:	3mm
Weight:	48kg
User count:	7-12people



Model:	1500L septic tank
Size:	2010*1100*1040mm
Thickness:	4mm/5mm/7mm
Weight:	55kg/58kg/75kg
User count:	7-12people



Model:	2000L septic tank
Size:	2355*1210*1165mm
Thickness:	5mm/7mm
Weight:	82kg/105kg
User count:	10-15people



Model:	2500L septic tank
Size:	2750*1210*1180mm
Thickness:	7mm
Weight:	129kg
User count:	13-18people




Model:	3/7style -2000septic tank
Size:	2030*1120*1350mm
Thickness:	5mm/7mm
Weight:	89kg/105kg
User count:	10-15people




Model:	2/8style -1500septic tank
Size:	2030*1110*1120mm
Thickness:	5mm/7mm
Weight:	61kg/75kg
User count:	7-12people




Model:	2/8style -1500septic tank
Size:	1930*1150*1160mm
Thickness:	7mm
Weight:	90kg
User count:	7-12people

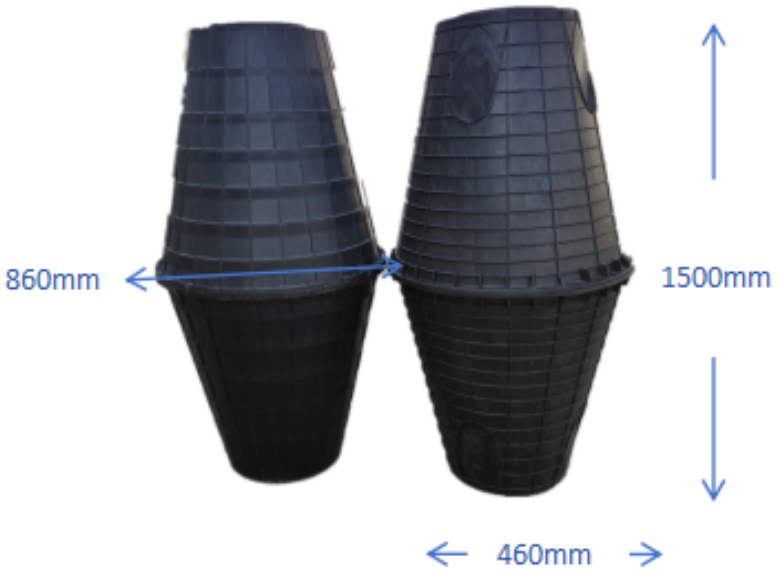


Model:	1000L-two urn septic tank
Size:	1500*460mm Inside diameter750mm Outside diameter860mm
Thickness:	4mm/5mm/7mm
Weight:	35kg/41kg/52kg
User count:	5-9people

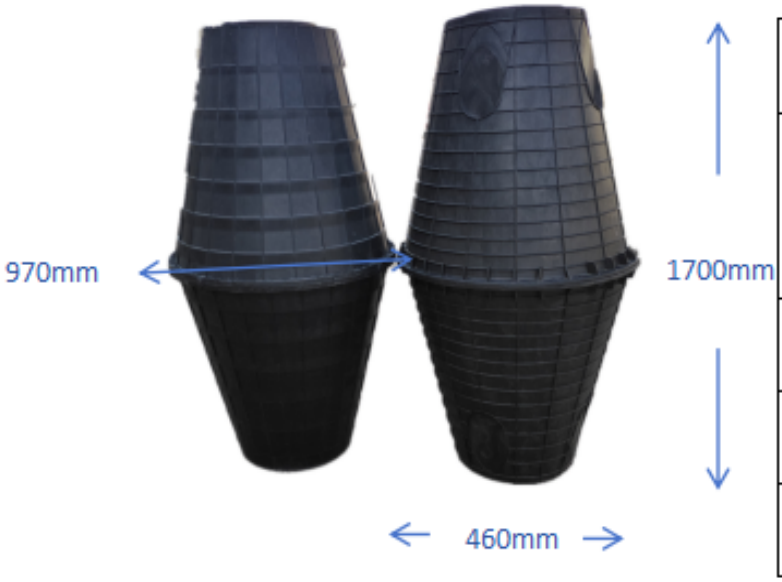

Model:	1500L-two urn septic tank
Size:	1700*460mm Outside diameter970mm
Thickness:	5mm
Weight:	50kg
User count:	5-9people

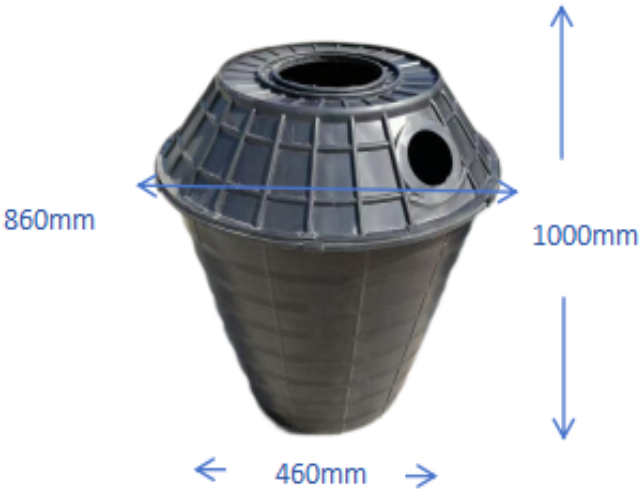

Model:	1000L-two urn septic tank
Size:	1000*460mm Inside diameter750mm Outside diameter860mm
Thickness:	3mm/4mm/5mm
Weight:	24kg/26kg/31kg
User count:	5-9people

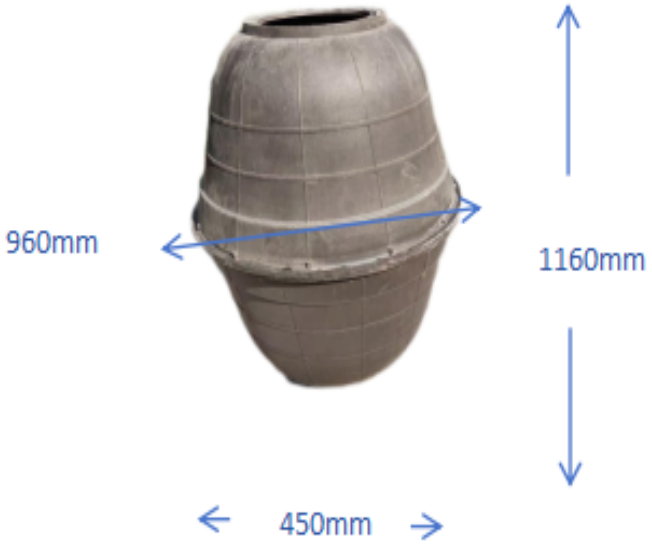

Model:	1000L-two urn septic tank
Size:	1160*450mm Outside diameter960mm
Thickness:	5mm
Weight:	35kg
User count:	5-9people

Spare Parts

CHENAN EP



Name	Diameter(mm)	Weight(KG)
Cover	200	0.21
	315	0.46
	400	0.805



Name	Diameter(mm)	Weight(KG)
Elbow Pipe	110	0.115



Name	Model	Diameter(mm)	Weight(KG)
Partition Panel	0.6	705	1.8
	1	835	2.9
	1.5	950	3.9
	2	1050	5.8
	2.5	1050	7.5



Name	Model	Diameter(mm)	Weight(KG)
Heightened Barrel	200	240*200*220	0.5
	315	360*315*220/150	0.75/0.6
	400	440*400*220/150	1.3/1



Sealing Tapepe




Sealing Ring



Nuts &Screws

Structural Analysis

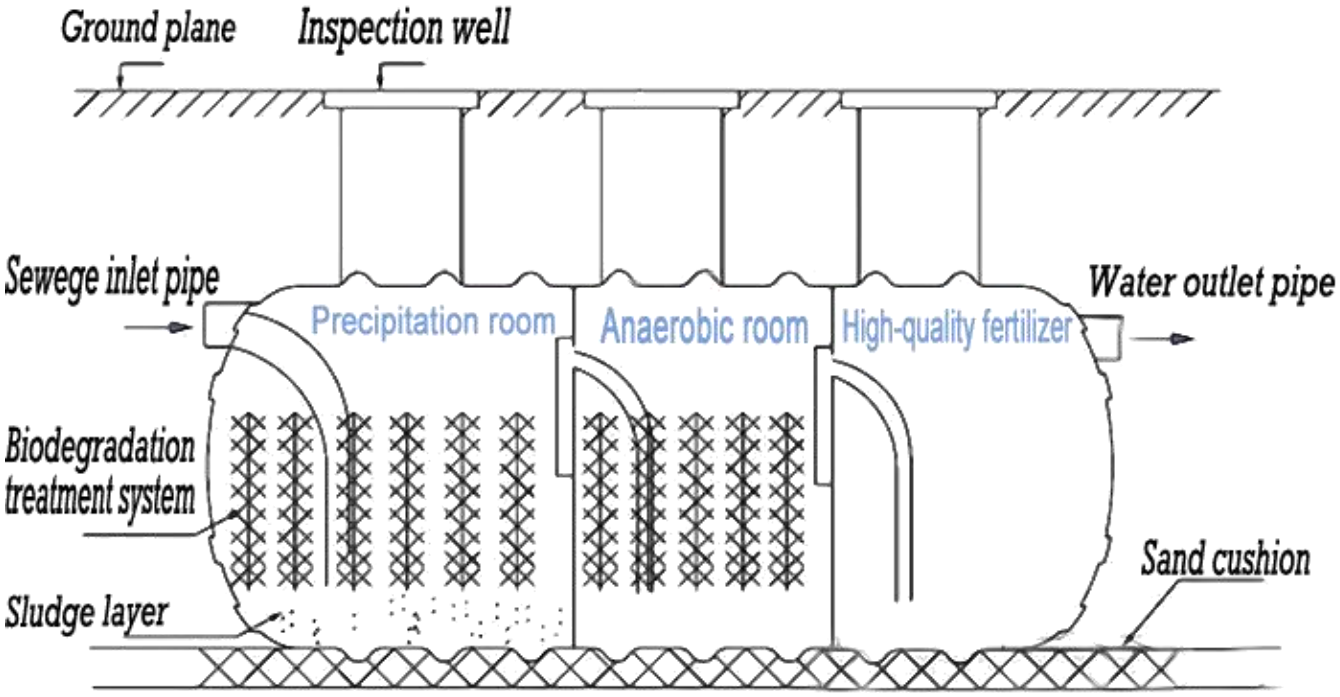

Chamber 1#


Function:
Precipitate inorganic matters, killing pathogens and viruses.
Useful Capacity: ≈0.2~0.83m3
Residence time:>20days

Chamber 2#

Function:
Continue to precipitate and ferment.
Most of germs are killed.
Useful Capacity:
≈0.1~0.42m3
Residence time:
>10days

Chamber 3#

Function:
Store decomposed manure, can be used as high-quality organic fertilizer.
Useful Capacity: ≈0.3~1.25m3
Residence time:>30days

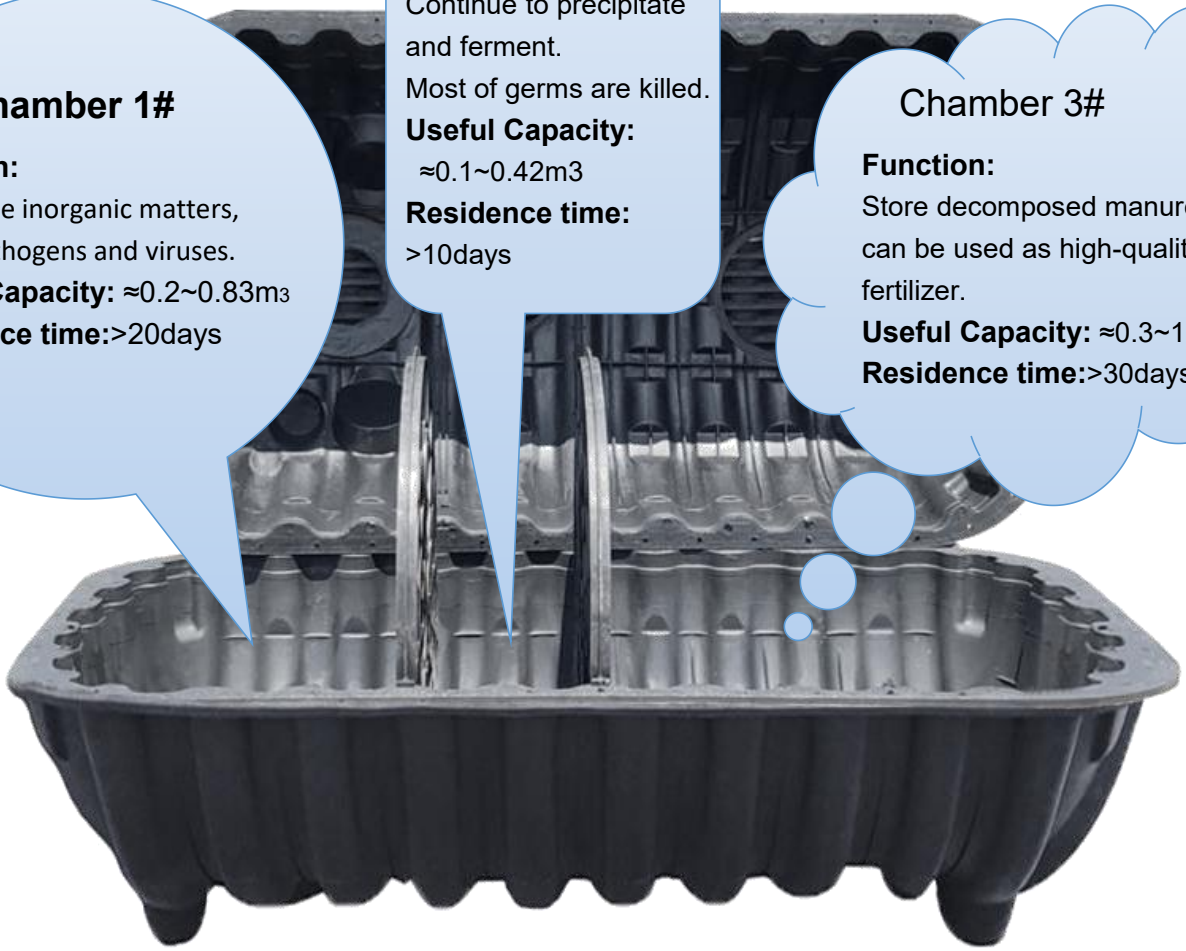

Product characteristics

CHENAN EP

PP Material
Environmentally Friendly
Durable

FIRST CHOICE







Injection Molding
Pressure Resistance

FIRST CHOICE



Thickened Partition
Prolong Life

FIRST CHOICE







Good Sealing
No Leakage

FIRST CHOICE



Product Installation

CHENAN EP



1. Lay down the bottom tank



2. Fix partition board to the edge buckle



3. Fix two partition board well



4. Install elbow



5.Sealing tape on the edge of the bottom tank



6. Open the water inlet/outlet hole, then install the sealing ring



7. Install upper tank



8. Sealed by bolts &nuts



9. Cover the viewing Manhole. Installation finished

Tip1: According to the need of sewage discharge, multi-angle interface installation is available.

Tip2: You can contact the salesperson for a detailed installation manual.

Construction site

CHENAN EP









